


# CARGO ALL PLANT TILTBED

## CARGO ALL PLANT TILTBED


STANDARD EQUIPMENT.

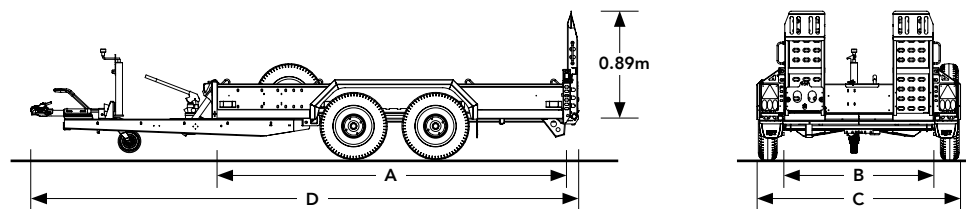

STANDARD									
LOAD BED LENGTH m A	3.10					3.70			
CAPACITY									
Gross kg	2,700	2,700	2,700	3,500	3,500	2,700	2,700	3,500	3,500
Load kg	2,100	2,070	2,022	2,789	2,740	2,033	1,992	2,751	2,710
Unladen trailer weight kg	600	630	678	711	760	667	708	749	790
DIMENSIONS									
Internal bed width m B	1.30	1.60	1.85	1.60	1.85	1.60	1.85	1.60	1.85
Overall trailer width m C	1.82	2.12	2.33	2.12	2.37	2.12	2.33	2.12	2.37
Overall trailer length m D	4.81	4.76	4.81	4.80	4.80	5.43	5.43	5.43	5.43
Bed load height m	0.38	0.40	0.40	0.38	0.40	0.40	0.40	0.39	0.39
Towball height (loaded, centre of towball) m	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40
Working load angle	8°	8°	8°	8°	8°	7°	7°	7°	7°
RUNNING GEAR									
Axles	2	2	2	2	2	2	2	2	2
Wheel / Tyre size	13" (165 6pr)	13" (165 6pr)	13" (165 6pr)	13" (195/50)	13" (195/50)	13" (165 6pr)	13" (165 6pr)	13" (195/50)	13" (195/50)
Sealed wheel bearings	●	●	●	●	●	●	●	●	●
Spare wheel	●	●	●	●	●	●	●	●	●
PRODUCTS									
Product code	541-1110	541-1120	541-1130	541-1310	541-1320	541-2110	541-2120	541-2310	541-2320
PRICE									
£ ex vat	2,689	2,849	2,929	2,979	3,159	3,139	3,159	3,439	3,709

# CARGO ALL PLANT TILTBED

OPTIONAL EQUIPMENT.

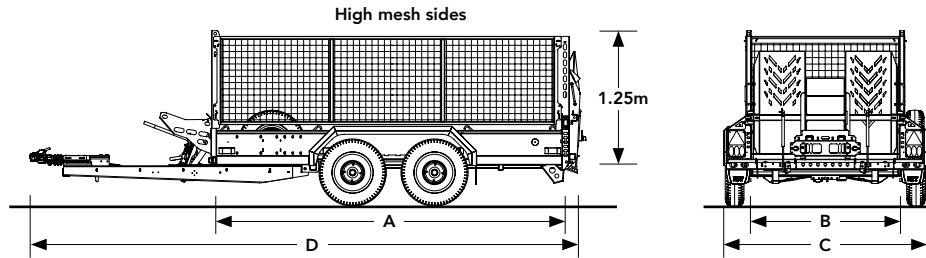

OPTIONS	prices in £ ex vat	
<b>LOAD BED LENGTH m A</b>	3.10	3.70
<b>BED BASE</b>		
Reinforced heavy duty deck bed	●	●
Aluminium tread plate bed lining	259	449
Supergrip tracks x 2. Overlay for bed, provides hi-grip steel tracks (each track 2.50m long).	209	209
<b>REAR LOADING</b>		
Adjustable position "high grip" punched ramps x 2	●	●
Twin ramp "knife edge" loading panel + gas spring assistance	79	79
<b>SIDE OPTIONS</b>		
High mesh side extensions 0.80m (removable)	369	409
Ladder rack	79	79
<b>BUCKET REST</b>		
Digger bucket rest	59	59
<b>STORAGE</b>		
Strap storage side locker	139	139
<b>WINCH</b>		
Manual winch auto brake + central pulley (not available on models with an internal bed width of 1.30m)	259	259
Electric winch 4,500, remote control	419	419
Battery power pack, portable 12v, HD – mains voltage or in car recharge	210	210
<b>LOADING, WHEELS AND SECURITY</b>		
Machine stop bar	59	59
Tie-down anchor points (internal)	16 points	16 points
Tie-down straps x 4 – 4,000 DaN heavy duty	123	123
Wheels-Safety kit – torque wrench + digital tyre pressure gauge	44	44
Tyre pressure monitoring system – TPMS. By TyrePal. In car monitor, external sensors.	169	169
Cast steel coupling head with integral high security lock	●	●
40mm eye coupling	43	43
Datatag – Security identification system	83	83
Tracker – Anti theft device. By SureTrack. Full time monitoring 24/7. Location of asset + coordination of recovery service. Thatcham approved. Sold secure approved. Yearly monitoring fee £ 90. Year 1 incl.	399	399

● Standard. ○ Option. — Not available.

CARGO ALL PLANT TILTBED.